

**NEW**





**Matt chrome  
look**



**Brushed stainless steel  
look**



**Black**

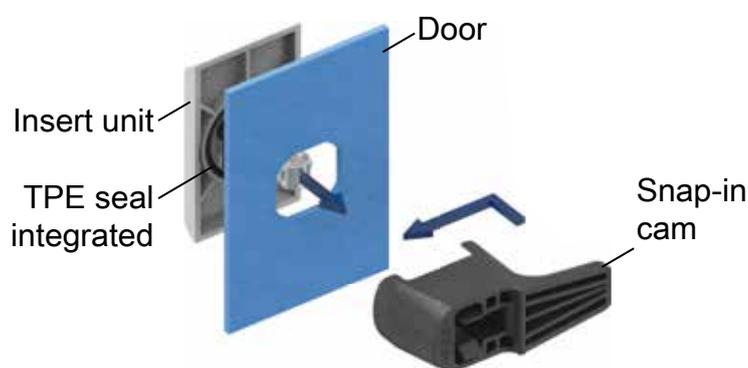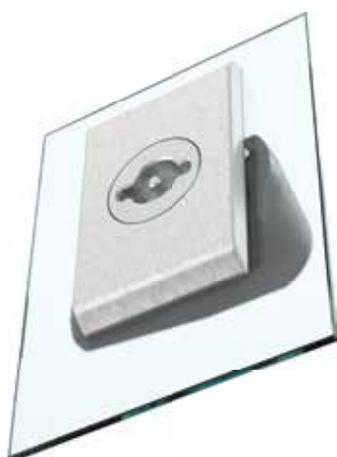

**2 parts mounted in 3 seconds!**

## Quarter turn for quick mounting and freely designed foil


It takes only two steps to mount the two-part quick-mounting quarter turn: From the front of the door, you put the insert unit into the designated mounting hole, from the back you insert the snap-in cam and push it until it catches. Done in only 3 seconds!

### Product features at a glance:



- Pre-assembled insert unit: housing plate of polyamide GF, insert of zinc-die
- Quick snap-in assembly without tools saves up to 80% assembly time
- On request, housing plate with freely designed foil e.g. company logo and/or material imitation
- Various inserts in stock (further inserts on request)
- Housing with integrated cam of polyamide GF
- Self-sealing construction with integrated TPE seal onto the back of housing plate (IP 69K)
- Used at door thickness from 1.0 mm until 3.0 mm (Ts including surface coating)
- Standard cut out □ 20.1 rounded up to 22.5, Program 1000
- Patented and design protected

\* For technical details see back page \*


# NEW

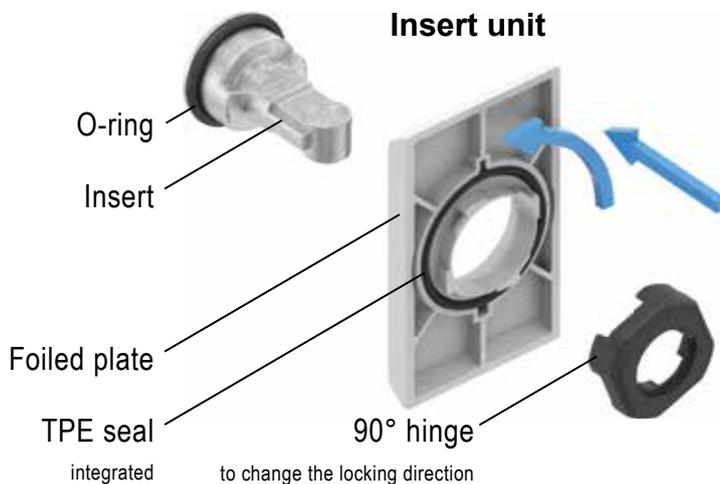



Insert unit pre-assembled

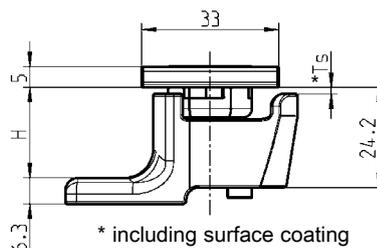

Quarter turn-quick mounting



Snap-in cam



Insert unit pre-assembled:  
 Insert zinc die with O-ring;  
 housing plate polyamide GF black① or light grey② RAL 7035 with integrated TPE seal;  
 design foil on choice; 90° stopper polyamide GF black

| Insert zinc die with O-ring<br><br>Further inserts on request! | Housing plate polyamide GF with integrated TPE seal |                                     |   |  |
|--|---|-------------------------------------|---|--|
|  | black ①   | with design foil of different looks |   |  |
|  |   | matt chrome onto light grey ②       | brushed stainl. steel onto light grey ② | foiled plate by customer design ① or ② |
| Square 7   | 1000-U914   | 1000-U918                           | 1000-U922                               | on request                             |
| Square 8   | 1000-U915   | 1000-U919                           | 1000-U923                               | on request                             |
| Triangular 8   | 1000-U916   | 1000-U920                           | 1000-U924                               | on request                             |
| Double bit 3   | 1000-U913   | 1000-U912                           | 1000-U909                               | on request                             |
| Slot 2x4   | 1000-U917   | 1000-U921                           | 1000-U925                               | on request                             |

Snap-in cam polyamide GF black

| H  | further H-dimensions on request | Ts = 1.0 - 1.5 * | Ts = 1.5 - 2.0 * | Ts = 2.0 - 2.5 * | Ts = 2.5 - 3.0 * |
|----|---------------------------------|------------------|------------------|------------------|------------------|
| 18 |                                 | 1000-590         | 1000-591         | 1000-592         | 1000-593         |
| 22 |                                 | 1000-594         | 1000-595         | 1000-602         | 1000-597         |
| 24 |                                 | 1000-598         | 1000-599         | 1000-600         | 1000-601         |