Elektronischer Schwenkgriff mit mechanischer Überschließung

Dieser Griff dient als elektromechanischer Verschluss für Datenschränke. Durch Anlegen eines 12 oder 24 V DC Signals erfolgt die Freigabe (LED an). Nachdem der Griff kurz in die Mulde gedrückt wurde, kann er geöffnet werden. Zum Schließen muss der Griff fest in die Mulde gedrückt werden, bis der Schließmechanismus einrastet; durch festes Ziehen am Griff prüfen. Ein eingebauter Reedkontakt dient zur Fernüberwachung des Griffzustandes Bei Stromausfall steht nach Entfernen der Zylinderabdeckung eine Notöffnung mittels konventionellen Schließzylinders zur Verfügung. Die Abdeckung muss nach dem Entfernen ersetzt werden.

Technische Änderungen vorbehalten.

Electronic Swing Handle with Mechanical Override

This swing handle was designed to enhance security for data racks. It is operated by applying 12 or 24 V DC. An LED is energized indicating "unlocked." The handle must then be pushed in slightly and released to allow the door to open. This makes it unlikely that the door will be left unlocked inadvertently. To lock, the handle is pressed firmly into the escutcheon until the locking pin engages. For remote operation and monitoring a reed contact indicates locked / unlocked status. In case of power loss a concealed key override is available. The protective cover must be replaced after removal.

Subject to technical changes

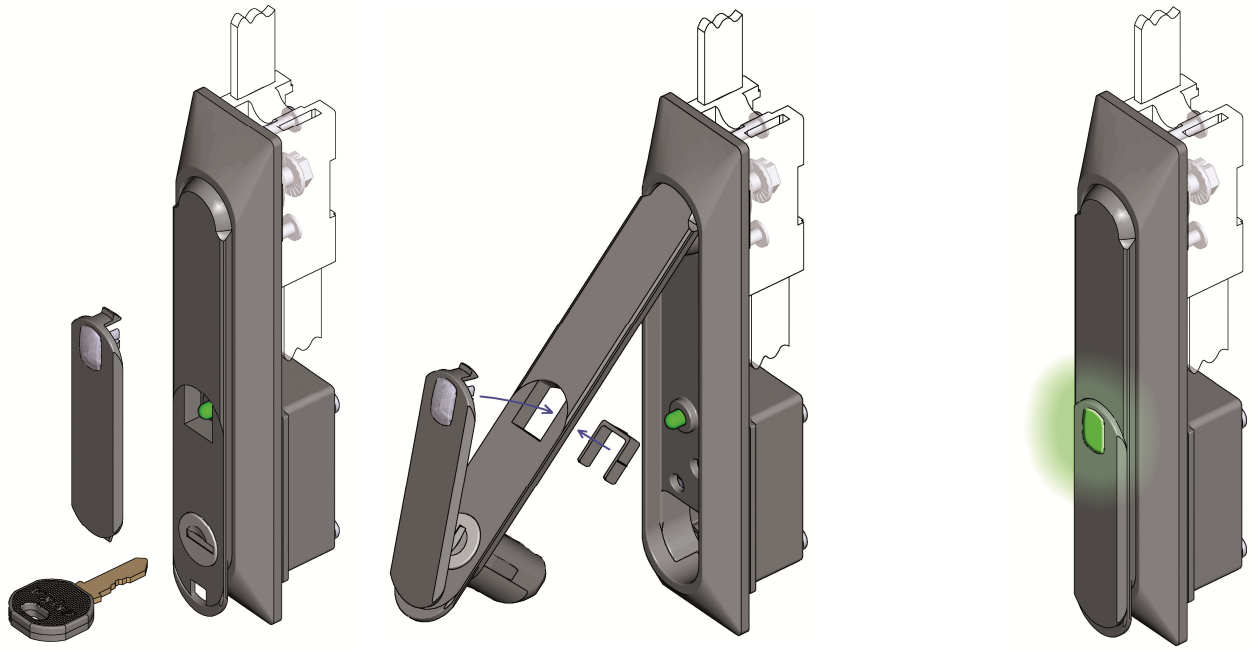

Power Supply	1150-U5x- and 1150-U5x-V: 12 V DC, 180 mA 1150-U5x-01 and 1150-U5x-01V: 24 V DC, 100 mA
Power-On Time	unlimited
Reed Contact Data	max. 200 V DC, max. 0.5 A
Connecting Cable	4.0 m
Dimensions L x W x H	170 x 36 x 19 mm

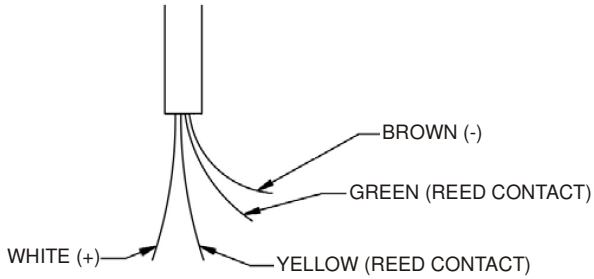

Fig. 1: 1150-U56/58-xx wiring diagram

Plug front side view	*Pin number of plug*	*Signal*	*Wire color*
4 3 2 1	1	contact	green
	2	solenoid	brown
	3	solenoid	white
	4	contact	yellow