Kartenleser HID für Wand- / Türmontage

Der Kartenleser 3000-U45-01 wird als externe Leseeinheit an das ProxLock Modul 3000-U47-xx des ELM Systems angeschlossen und kann diverse kontaktlose Karten auf Basis HID und anderer Kartensysteme lesen.

Technische Änderungen vorbehalten.

Card Reader HID for panel / door mounting

The card reader device 3000-U45-01 is connected to the ProxLock module 3000-U47-xx of the ELM system. It is able to read various contactless cards based on HID or other technologies.

Subject to technical changes.

Fig. 1: Reader (front side)

Power supply:	5 …16 V DC, 45 mA (75 mA when active)
Reader dimensions:	48 x 103 x 23 mm (W x H X D)

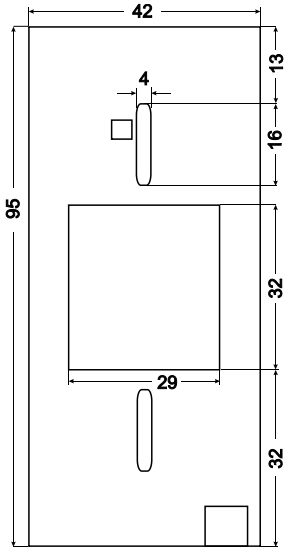

Fig. 2: Rear cover for panel mounting

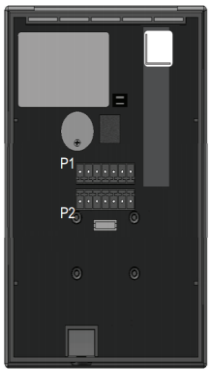

Fig. 2: Reader (rear side)

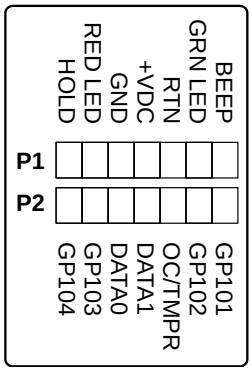

Fig. 4 Terminal assignment reader

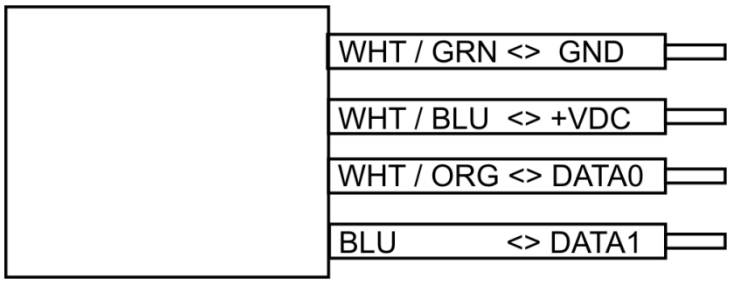

Fig. 5 Connecting cable with RJ45 jack

Reader wiring

The connecting cable to the reader is not included. Use standard 4 or 6 wire cable to link reader and connecting plug supplied with the proximity module 3000-U47-xx. LED connectors are optional and not needed to operate the reader.
Max. cable length between reader an proximity module is 10 m.

Power supply

Power will be fed to the reader by the proximity module 3000-U47-xx.