


Coming
soon

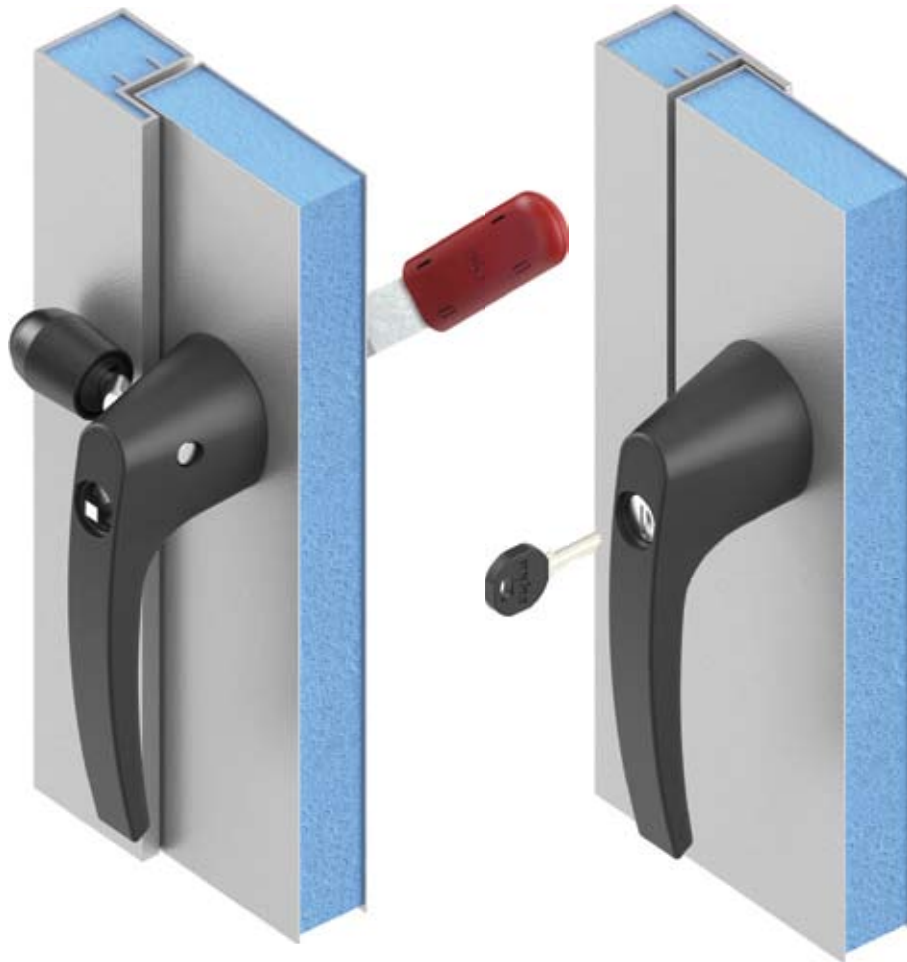


For doors opening inwards (in-swing)

For doors opening outwards (out-swing)

HVAC Handle-System

- **New modular handle with an innovative design**
- Suitable for doors opening inwards and outwards
- Suitable for various door thicknesses
- **Fits 2 standard cut outs (19 mm, 13 mm)**
- Variety of locking options
- Roller Cam with adjustable clamping load
- **Removable handle**
- Meets the industry-specific national and international standards
- Conforms with the entire EMKA range
- Material: Polyamide with 30% glass filled
- Air Tightness class L1-L3 possible
- **Patented**

Coming soon

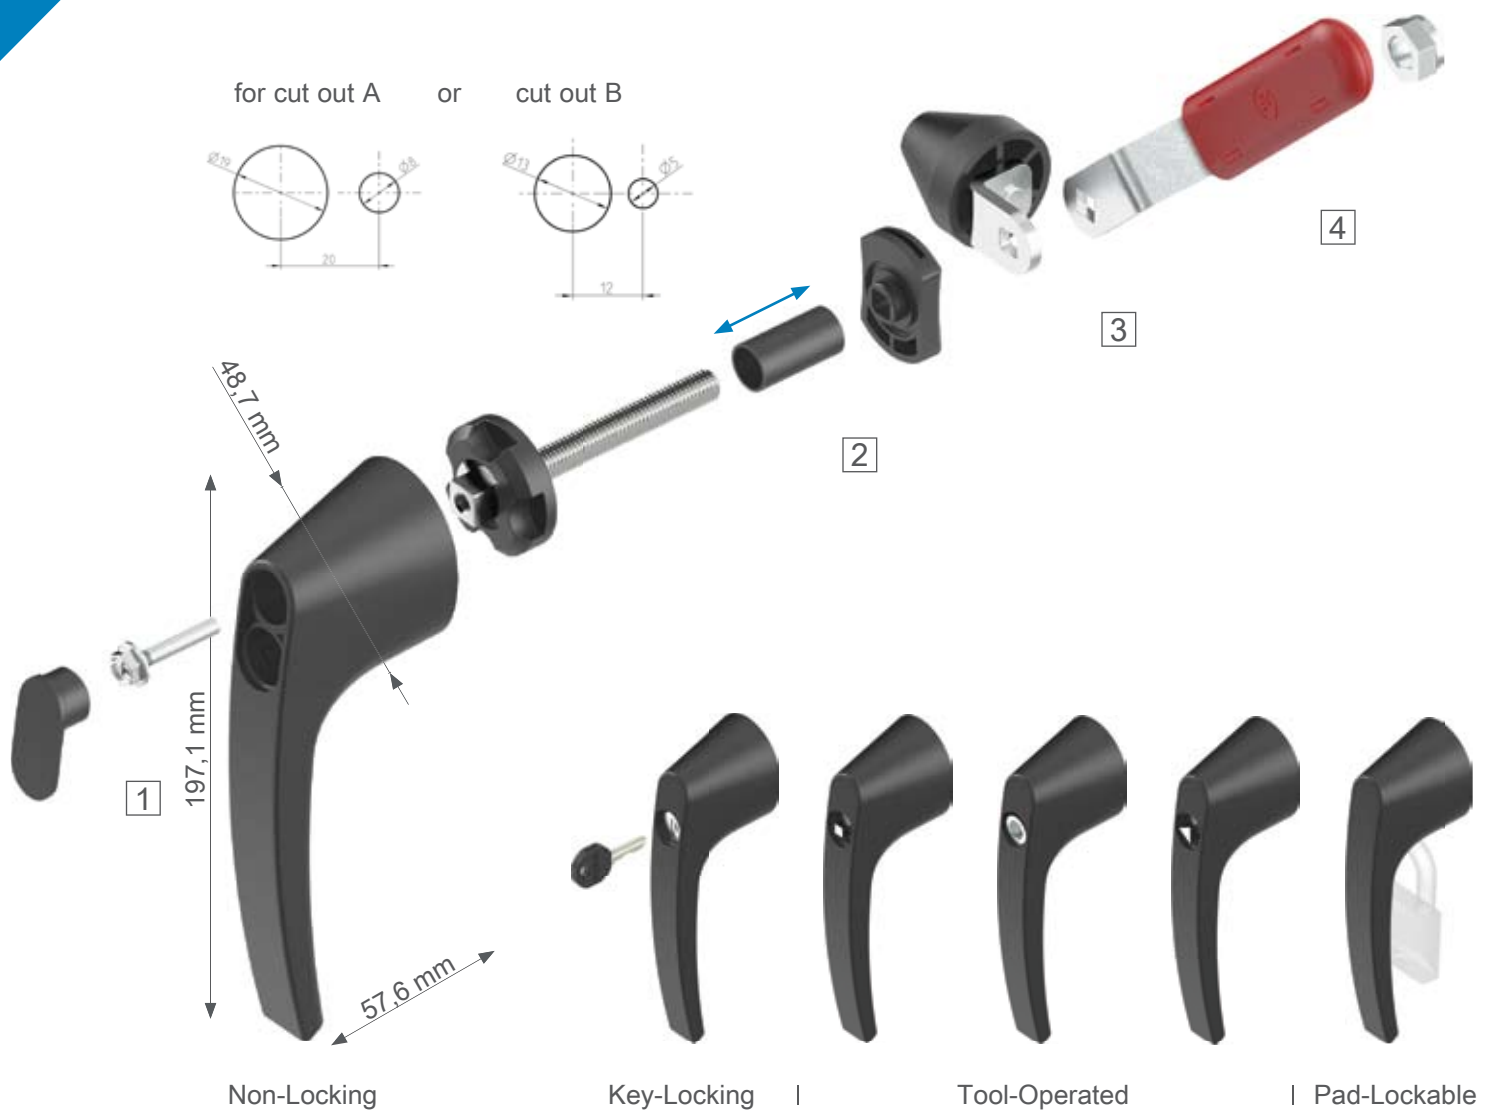

Product Features

- 1 Sleak ergonomic lines shape the design of the new EMKA HVAC handle. The handle system makes the simple and quick mounting of all the components possible.
- 2 The inside mechanism is the heart of the new locking system of EMKA as it connects the outside handle with the inside components. This set-up of the lock has been specially developed for the use in panel and sandwich doors used in HVAC installations. The handles are available in a variety of locking options. Handles can be easily replaced in the field.
- 3 Roller cam with adjustable clamping load can be mounted quickly and easily to ensure the desired compression. In addition, EMKA offers the possibility of multi-point latching.
- 4 EMKA offers a variety of optional components such as inside unlocking and the two-step opening system important for overpressure installations. The comprehensive choice of hinges and gaskets completes the range.